


INSTRUCTION

Industrial Hall
982697.002




L 175, B 56, H 28









100 g



EN 12464

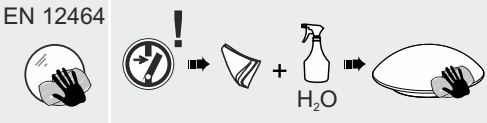


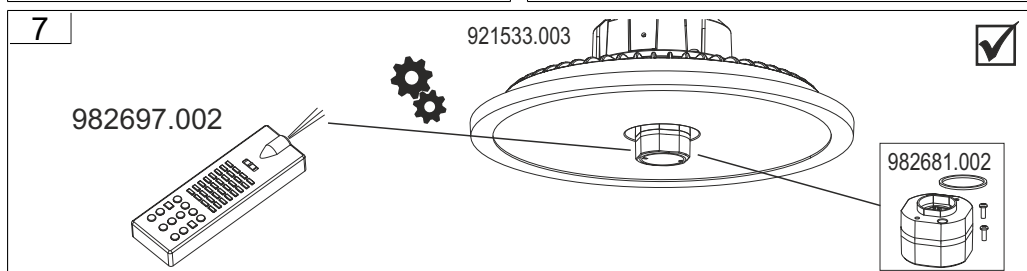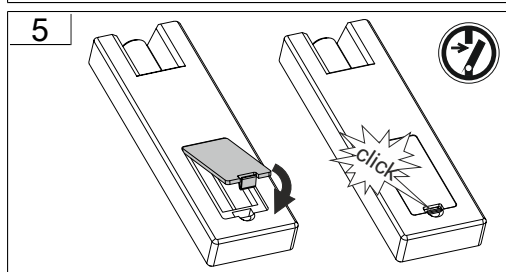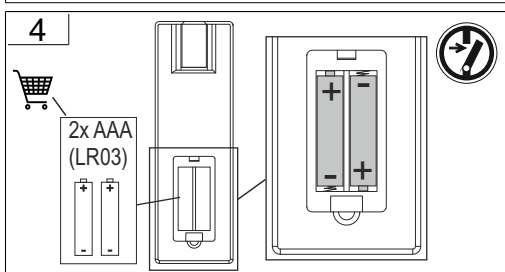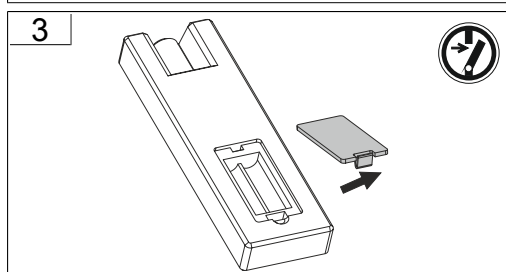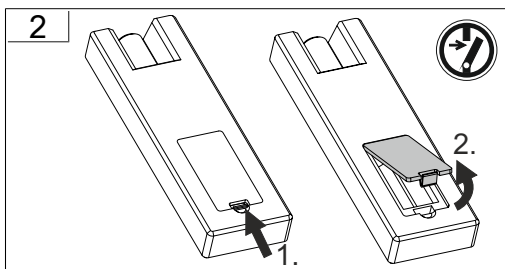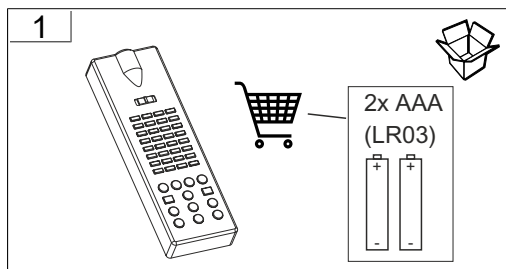

8a



Fernbedienung

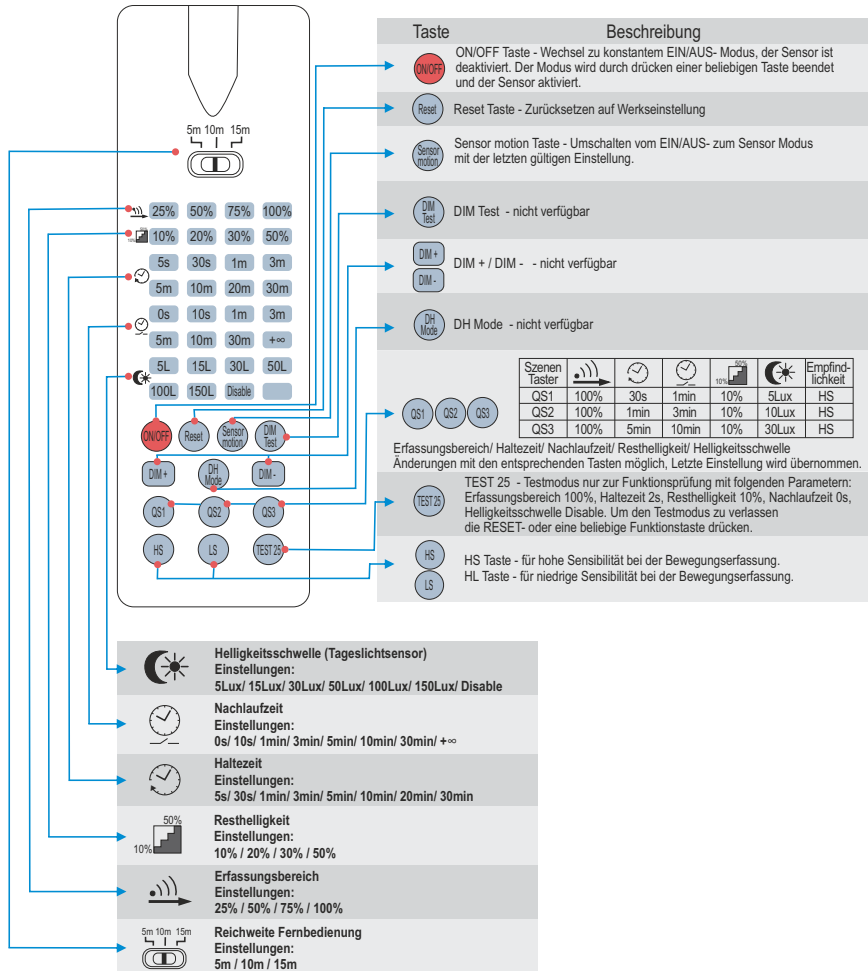



Remote Control

Button	Remarks																												
[Power]	Press the "ON/OFF" button, the light goes to constant on/off mode, sensor is disabled. Press any button to quit from this mode and the sensor starts to work.																												
[Reset]	Press "Reset" button, all parameters are same as setting of DIP switch or factory settings.																												
[Sensor motion]	Press "Sensor motion" button, the light quits from the constant on/off mode, and the sensor starts to work (The latest setting stays in validity)																												
[DIM test]	Press "DIM Test" button, the 1-10 V dimming works to test whether the 1-10Vdc dimming ports are connected properly. After 2s, it returns to the latest setting automatically. (not applicable for MC079D RC)																												
[DIM+]	Short press "DIM+/DIM-" button to transmit dimming signal. The brightness of the lamp adjusts at 5% per unit. (not applicable for MC079D RC)																												
[DIM-]																													
[DIM mode]	Long press >3s, sensor will take current light level as target lux level, to dim up/down load automatically according to the change of ambient light level. (not applicable for MC079D RC)																												
[TEST 25]	Scene Options <table border="1"> <thead> <tr> <th>Scene Options</th> <th>Detection Area</th> <th>Hold Time</th> <th>Stand-by period</th> <th>Stand-by dim level</th> <th>Daylight sensor</th> <th>Induction model</th> </tr> </thead> <tbody> <tr> <td>Q01</td> <td>100%</td> <td>30s</td> <td>1min</td> <td>10%</td> <td>5Lux</td> <td>HS</td> </tr> <tr> <td>Q02</td> <td>100%</td> <td>1min</td> <td>3min</td> <td>10%</td> <td>10Lux</td> <td>HS</td> </tr> <tr> <td>Q03</td> <td>100%</td> <td>5min</td> <td>10min</td> <td>10%</td> <td>30Lux</td> <td>HS</td> </tr> </tbody> </table> Note: Detection area / Hold time / Stand-by period / Stand-by dim level / Daylight sensor can be adjusted by pressing the corresponding button. The latest setting will stay valid. Press the "TEST 25" bottom can enter the test mode anytime. At the mode, the sensor parameters as below: Detection Area is 100%, Hold Time is 2s, Stand-by Dim Level is 10%, Stand-by Period is 0s, daylight sensor disable. This function only for testing. Quit the mode by pressing "RESET" or any other function buttons.	Scene Options	Detection Area	Hold Time	Stand-by period	Stand-by dim level	Daylight sensor	Induction model	Q01	100%	30s	1min	10%	5Lux	HS	Q02	100%	1min	3min	10%	10Lux	HS	Q03	100%	5min	10min	10%	30Lux	HS
Scene Options	Detection Area	Hold Time	Stand-by period	Stand-by dim level	Daylight sensor	Induction model																							
Q01	100%	30s	1min	10%	5Lux	HS																							
Q02	100%	1min	3min	10%	10Lux	HS																							
Q03	100%	5min	10min	10%	30Lux	HS																							
[HS]	Press "HS" button to set the detection area to be high sensitive.																												
[LS]	Press "LS" button to set the detection area to be low sensitive. The adjustment bases on the "Detection Area" parameter you set.																												

[Daylight Sensor]	Daylight Sensor Set up daylight threshold: 5Lux/15Lux/30Lux/50Lux/100Lux/150Lux/ Disable
[Stand-by period]	Stand-by period Set up stand-by time: 0S/10S/1min/3min/5min/10min/30min/+∞
[Hold time]	Hold time Set up hold time: 5S/30S/1min/3min/5min/10min/20min/30min
[Stand-by dim level]	Stand-by dim level Set up stand-by dim level: 10%/20%/30%/50%
[Detection Area]	Detection Area Set up detection area: 25%/50%/75%/100%
[Remote Distance]	Remote Distance Toggle bottom can set the remote distance of remote control and sensor.



Bei Fragen zu unseren Symbolen,
besuchen Sie folgende Webseite:

If you have any questions about our
signs, visit the following website:



www.rzb.de/fileadmin/assets/downloads/PDF/RZB_Symbolklaerung.pdf



DECLARATION OF CONFORMITY



INTELLIGENT LIGHTING CONTROL

This declaration of Conformity is issued under the sole responsibility of the manufacturer.

The designated product(s) is (are) in conformity with the provisions of the following European Directives:

2014/53/EU

Directive of the european parliament and of the council of 16 april 2014 on the harmonisation of the laws of the Member States relating to the making available on the market of radio equipment and repealing Directive 1999/5/EC

1. Product(s): Motion sensor

Product Designation: Microwave motion sensor
Sensor Model number MC079D RC

2. Applicable Standards

The conformity of the designated product(s) with the provisions of the European Directives is given by the compliance with the following European Standard(s) (the latest amendment applies in any case):

EMC Directive 2014/30/EU

EN 301 489-1 V1.9.2(2011-09)

EN 301 489-3 V1.6.1(2013-08)

Red Directive 2014/53/EU

EN 300 440-1 V1.6.1(2010-08)

EN 300 440-2 V1.4.1(2010-08)

The CE mark was affixed in: 2018

We declared that above remote control provided here are CE compliance and fulfil related directive and standard requirements listed above.

Shenzhen, May 8th 2020

Company name: Shenzhen Merrytek Technology Co., Ltd.

Address: 2nd and 3rd Floor, No.3 building, 380 Xiangshan Avenue, Luotian, Yanluo, Baoan, Shenzhen, 518127, China

1st and on behalf of
Shenzhen Merrytek Technology CO., LTD
Signature 深圳 邁泰智能科技有限公司

2020.5.8

Authorized Signature

Function title of the signer: QC director



RZB - Rudolf Zimmermann, Bamberg GmbH
Rheinstraße 16
96052 Bamberg

☎ 0951/7909-0
Fax: 0951/7909-198

E-mail: info@rzb-leuchten.de