





INSTRUCTION

Flat Quadrat LED

Wand-/Deckenanbau

IP 43
 IP 44
 IK06 - PP
 F
 CE
 220-240 V / 50-60 Hz
 LED
 3 x 1,5 mm²
 1,5 mm² - 2,5 mm²

L 380 x B 380

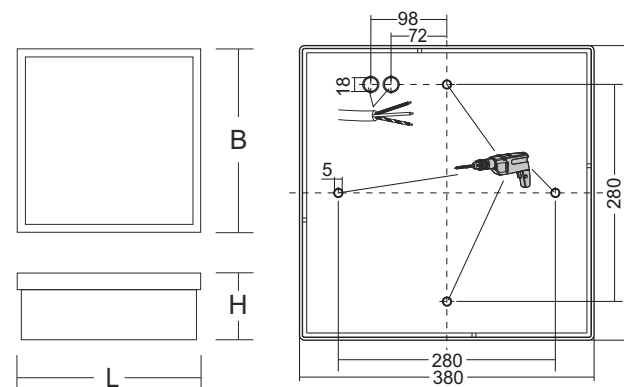

P



221161.002	L 380, B 380, H 78	1xLED, 3000 K	20,4 W	PP	2,78 Kg
221161.002.1	L 380, B 380, H 78	1xLED, 4000 K	20,4 W	PP	2,78 Kg
221166.002	L 380, B 380, H 78	4xLED, 3000 K	4x10 W	PP	3,00 Kg
221166.002.1	L 380, B 380, H 78	4xLED, 4000 K	4x10 W	PP	3,00 Kg




08-221073.002 L 380, B 380, H 62 0,478 Kg



Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

EN 12464



EN 12464



EN 12464

Wartungsplan/
Maintenance
schedule

RZB
Rudolf Zimmermann,
Bamberg GmbH
 Rheinstraße 16
 D-96052 Bamberg
 Deutschland
 Telefon +49 951/79 09-0
 Telefax +49 951/79 09-198
 www.rzb.de
 info@rzb-leuchten.de

