


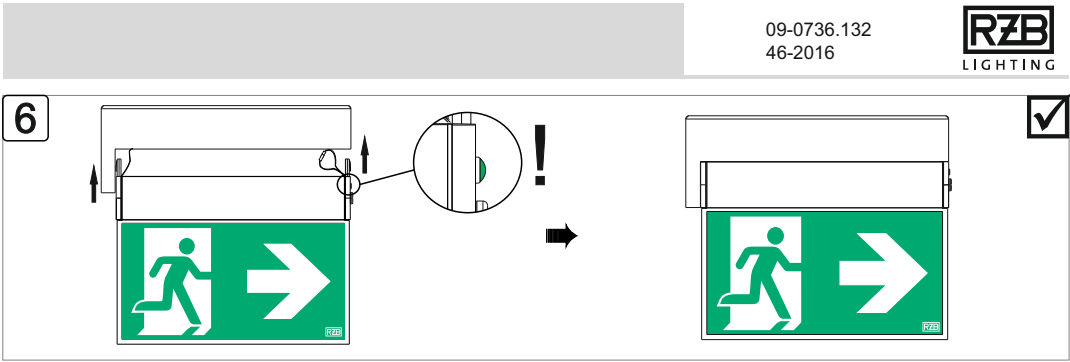

09-0736.132
46-2016

RZB
LIGHTING




INSTRUCTION

GSUN-S | Wandausleger
wall bracket
Zubehör / Accessories

09-0736.132
46-2016

RZB
LIGHTING

	IP30 220V - 240V / 50 - 60 Hz	1,5mm ² - 2,5mm ²		
--	----------------------------------	---	--	--

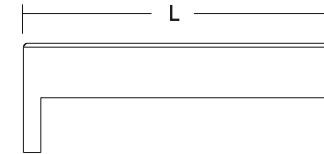

Zubehör / Accessories



[mm]






	24m	981779.00X.1	L259, B46, H90	2,2W	530 g
	32m	981797.00X.1	L339, B46, H90	3,0W	730 g

! Die Sicherheitsleuchten werden generell mit entladenen oder teilentladenen Akkus geliefert und müssen für die volle Funktionstüchtigkeit mindestens 24 Stunden am Netz angeschlossen sein.
The emergency luminaires are delivered with either discharged or only partially charged batteries and need to be connected for at least 24 hours before reaching their full operability.

.00X = 2 (Weiß / white), 4 (Silberfarben / silver color)



Verwendung in Anlagen /
Use in installations
EN50172 / VDE0108-100 !





Teil / Part	Menge / Quantity
	1
	1
	1
	1

RZB - Rudolf Zimmermann, Bamberg GmbH
Rheinstraße 16
96052 Bamberg
Telefon: 0951/7909-0
Telefax: 0951/7909-198



E-mail: info@rzb-leuchten.de




24m	981779.00X.1	L259, B46, H90	2,2W 530 g

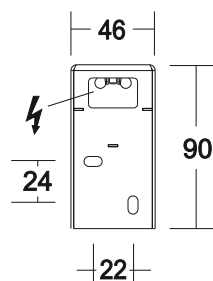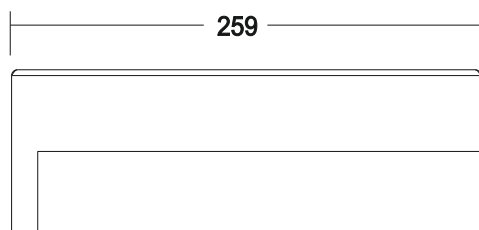


32m	981797.00X.1	L339, B46, H90	3,0W XXX g

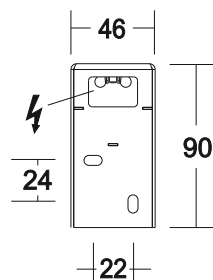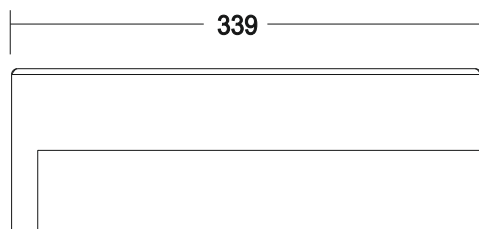


1

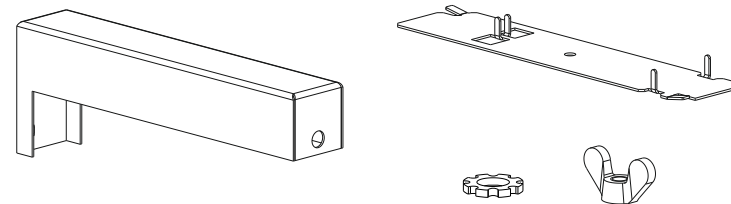


2

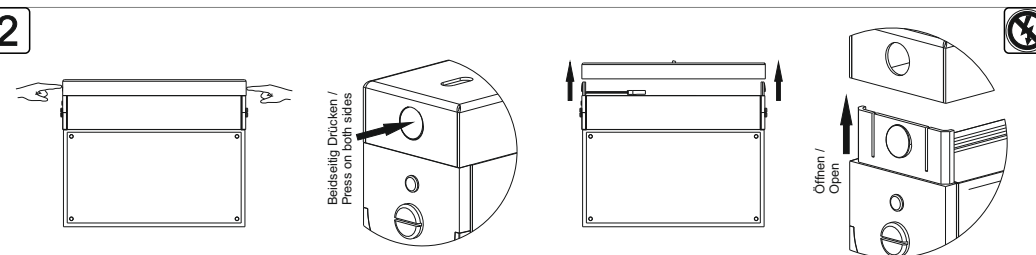

3

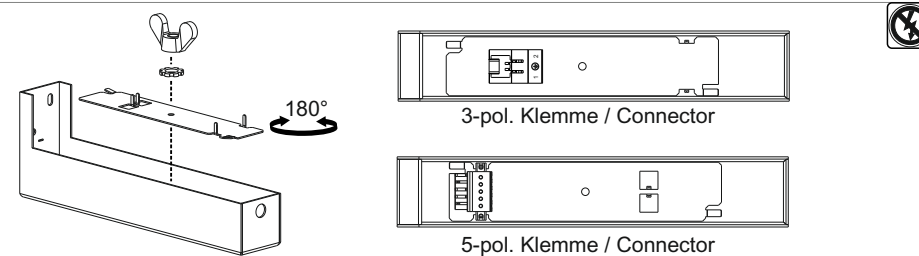

4

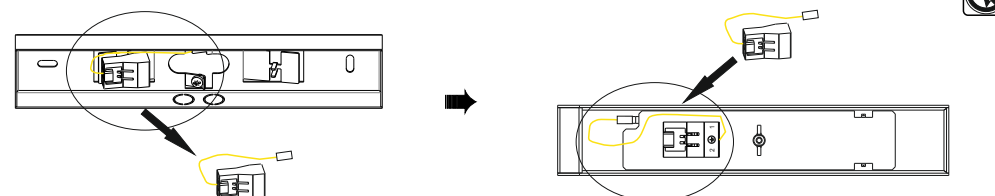

5

