

INSTRUCTION

05-2017

RZB
LIGHTING

Alu-Star

721811.0031



IP 65 IK07






220 - 240 V / 50 - 60 Hz



3 x 2,5 mm²



2,50 mm²

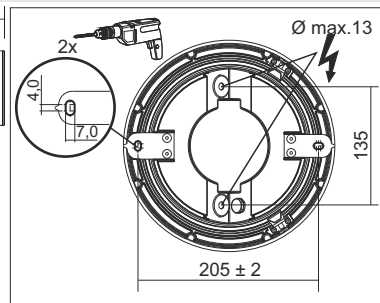

721811.0031

L 305, B 240, H 310

LED

88 W

7,2 kg



EEK_{LED}

EEK

CRI

CCT


9550 lm

A++

A++

80

3000K




6

11

10

22

43,5 A



Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

EN 12464



EN 12464




EN 12464
Wartungsplan/
Maintenance
schedule




RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de




1



2




3




Inbus
3 mm


4








5

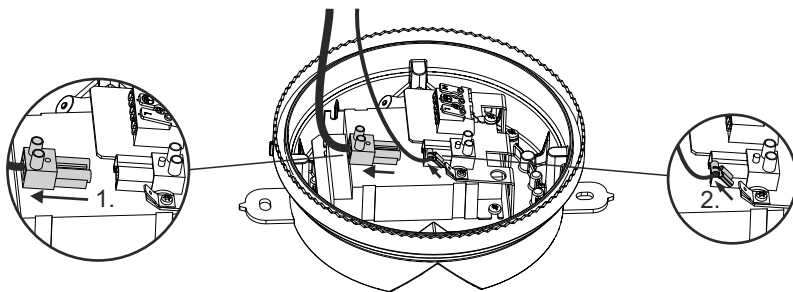


6

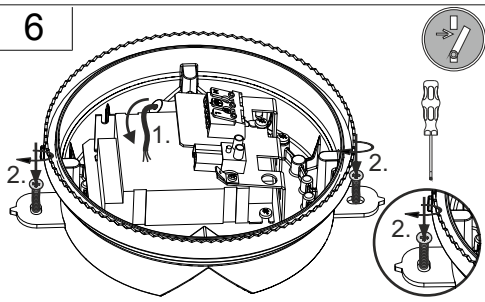

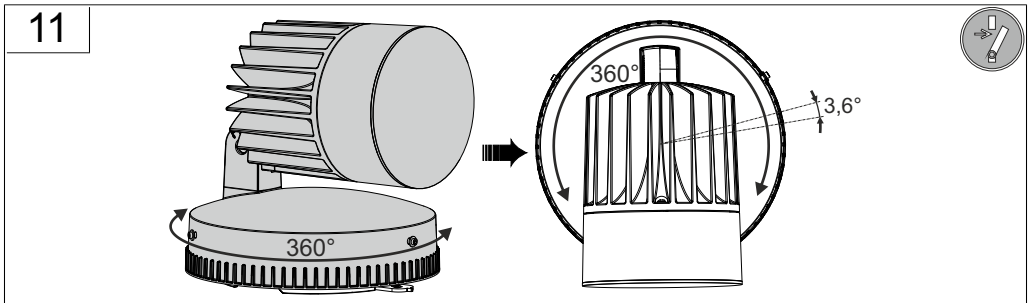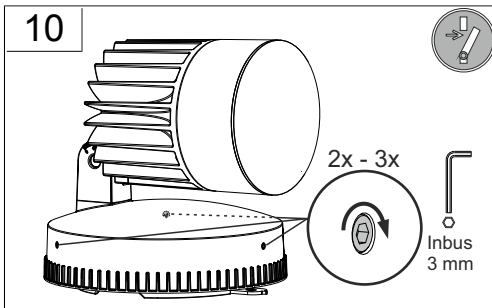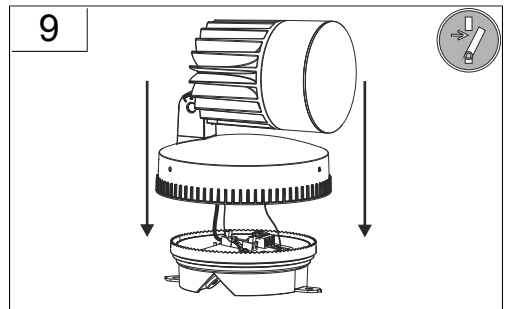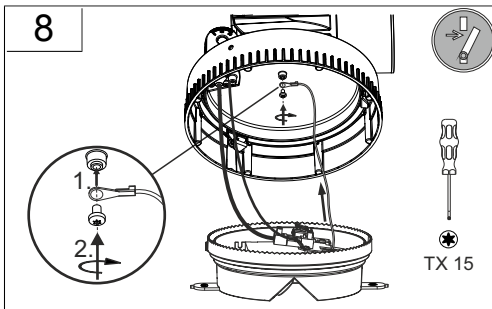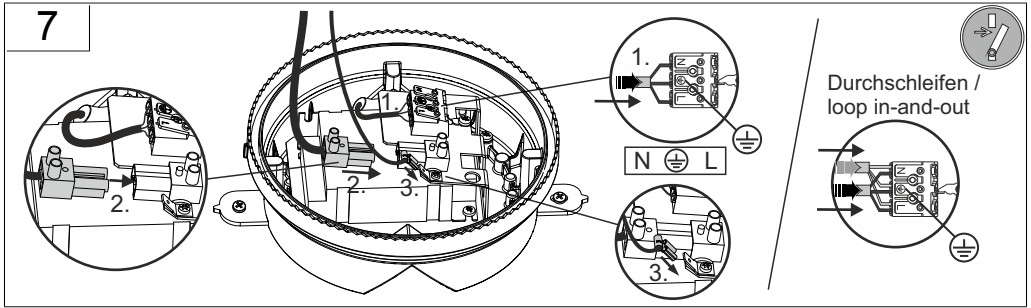





12

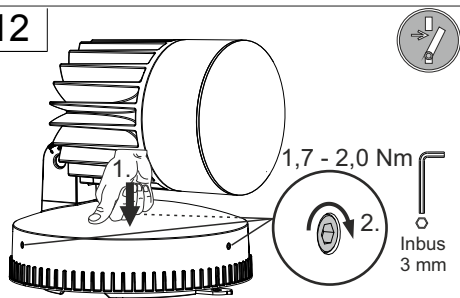


13








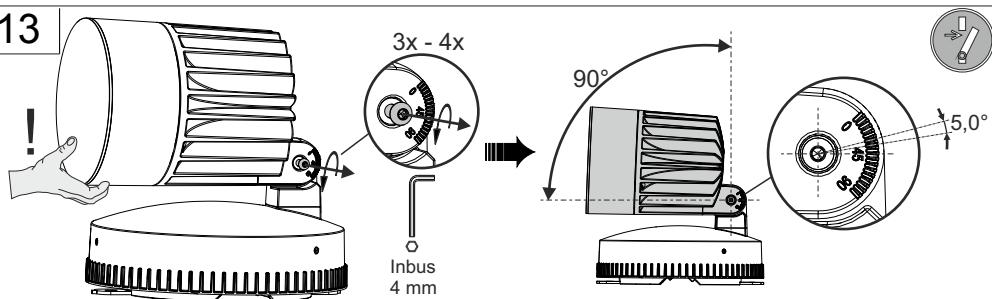


14

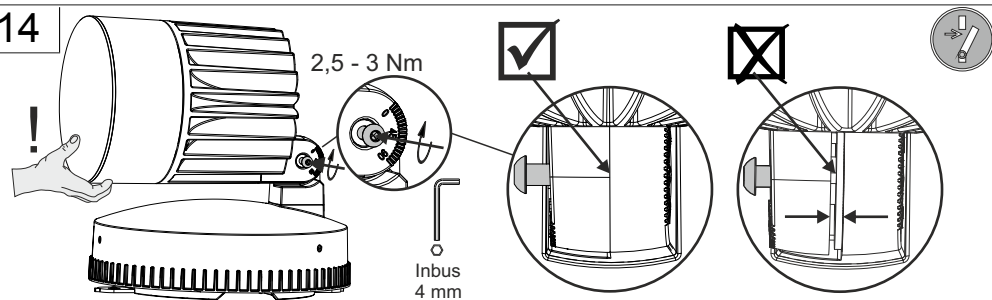


15

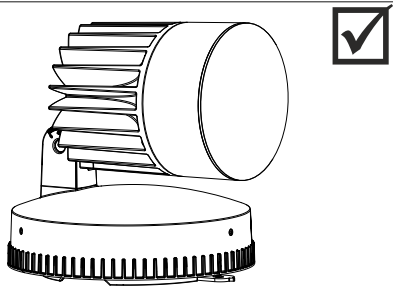

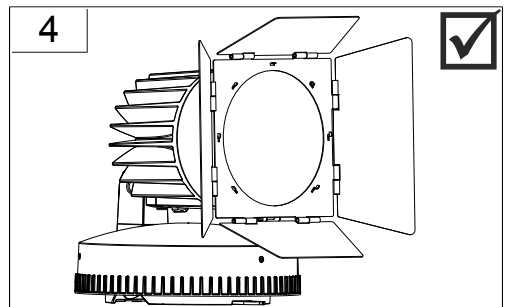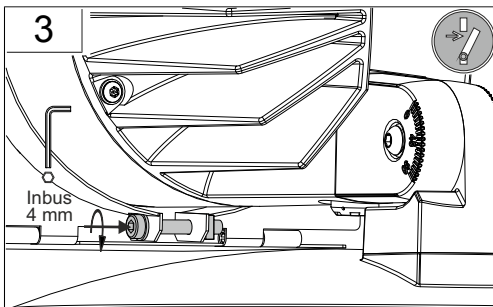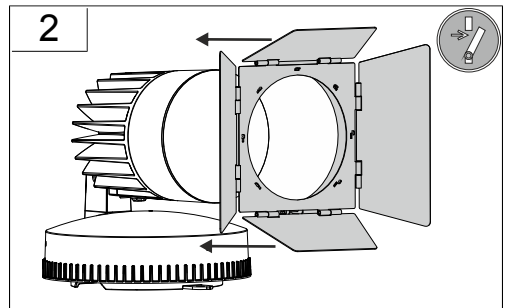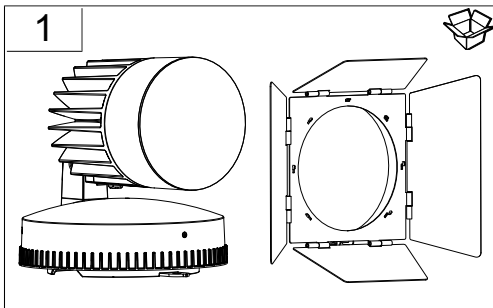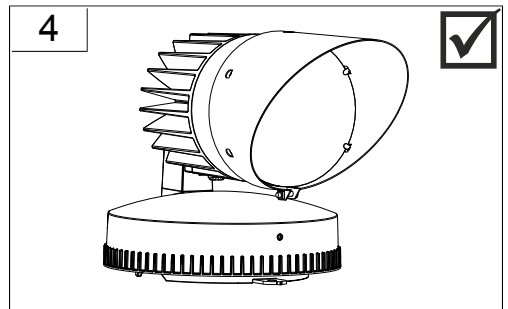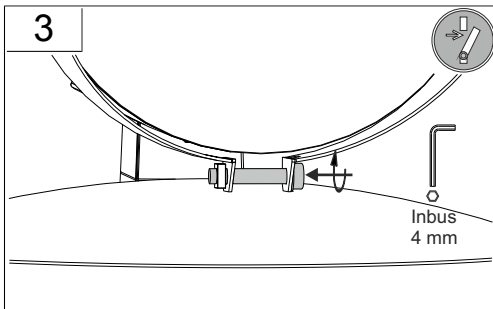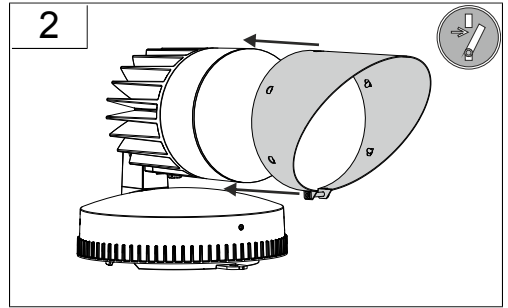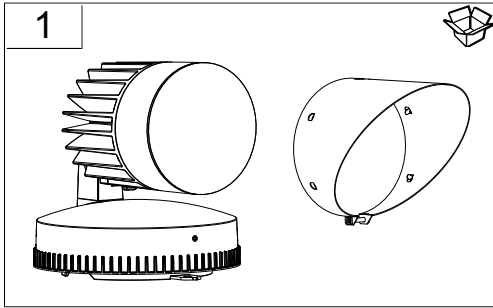





1

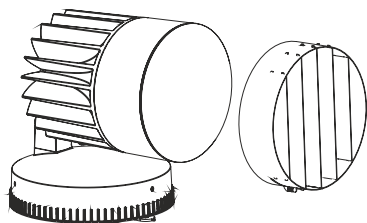


2



3

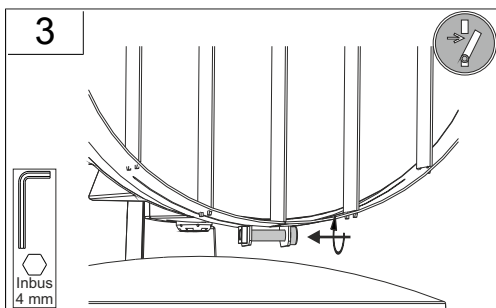

4





DIN 4844




Vor Wartung oder Reparatur freischalten/
power off before maintenance or repair



Temperatur / temperature
=> -25 °C - +40 °C

Indoor & Outdoor

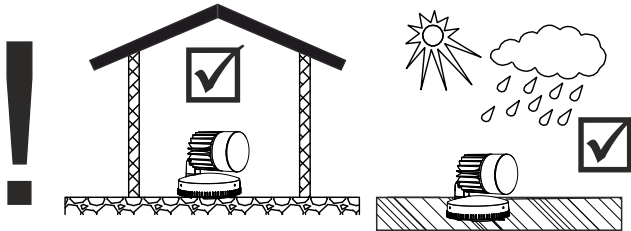

! 0.5 m

Der Abstand zu beleuchteten Gegenständen
muss mindestens 0.5 m betragen!
The distance to the direct illuminated objects
must be at least 0.5 m!



	982164.003	L 220D 211, H 65	450 g
	982167.003	L 241, B 212D 215, H 221	250 g
	982170.003	L 438, B 438, H 31	510 g
	982161.006	D 211, H 58	560 g
	982161.007	D 211, H 58	560 g
	982161.0077	D 211, H 58	560 g
	982161.008	D 211, H 58	560 g
	982242.0031	D 240, H 40, HE 400	2,5 kg