

INSTRUCTION

05-2017

RZB
LIGHTING

Alu-Star

721807.0031



IP 65 IK07






220 - 240 V / 50 - 60 Hz



3 x 2,5 mm²



2,5 mm²

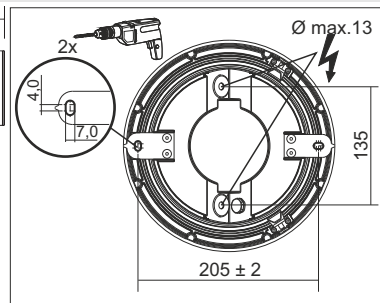

721807.0031

L 255, B 240, H 255

LED

57 W

4 kg



EEK_{LED}

EEK

CRI

CCT

5100 lm

A+

A++

80

3000K



18




30




31



51



10 A



Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

EN 12464



EN 12464




EN 12464

Wartungsplan/
Maintenance
schedule




RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de


1



2




3




Inbus
3 mm


4








5

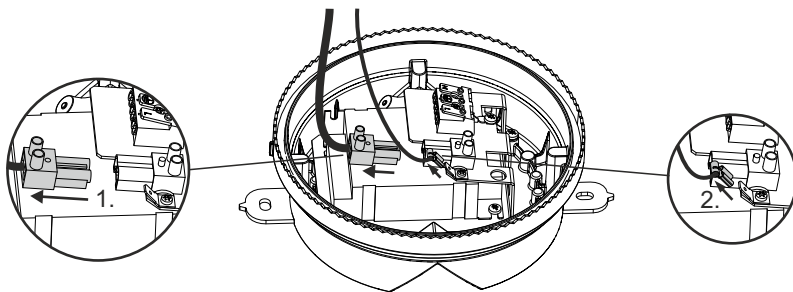


6

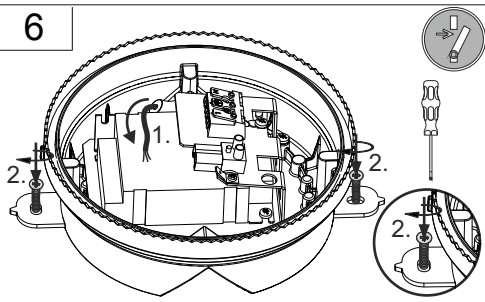

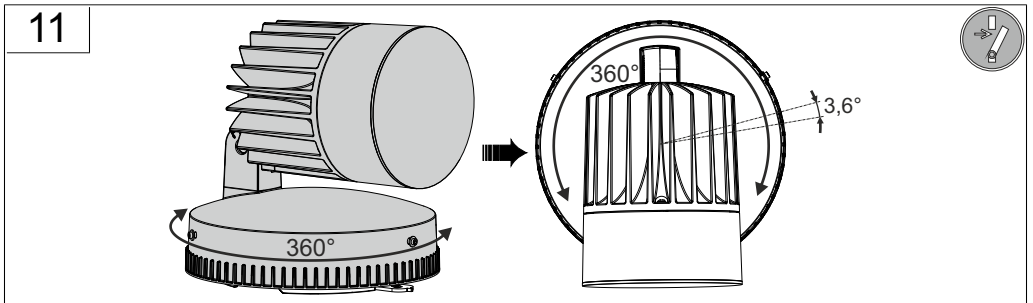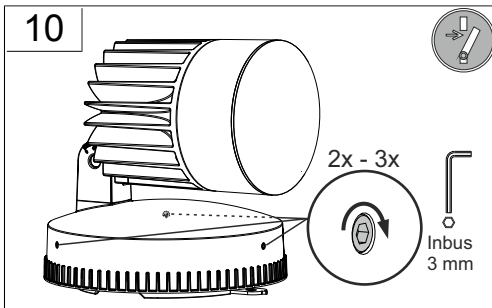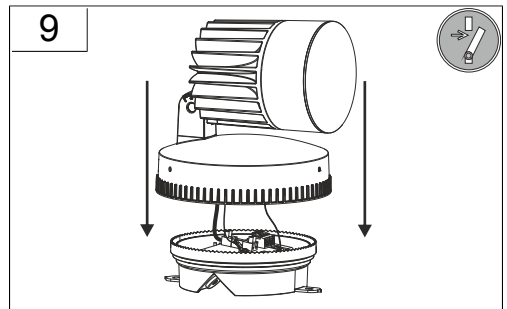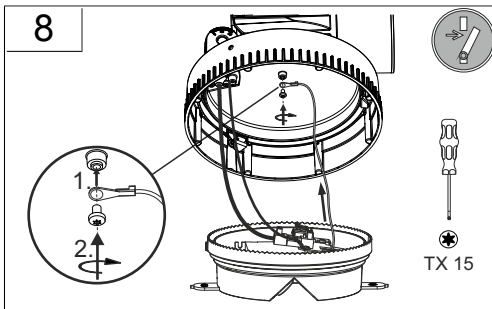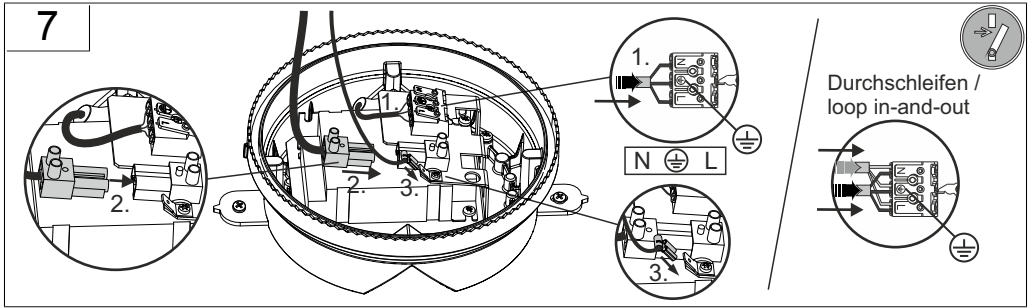





12

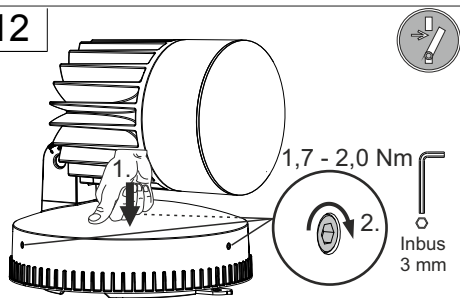


13








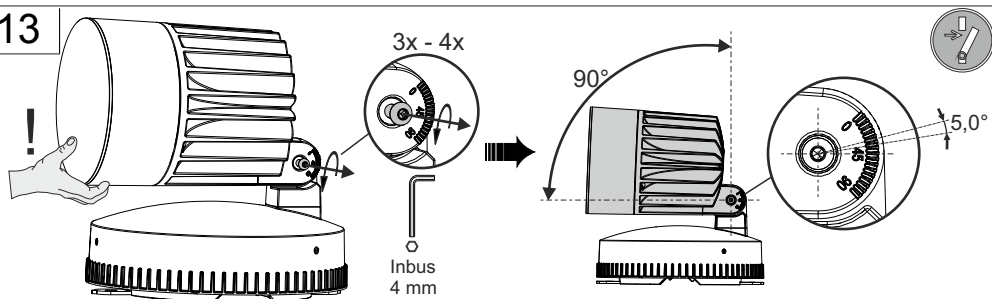


14

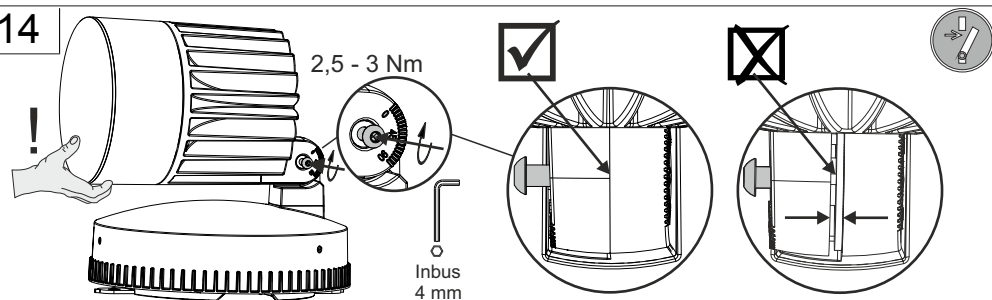


15

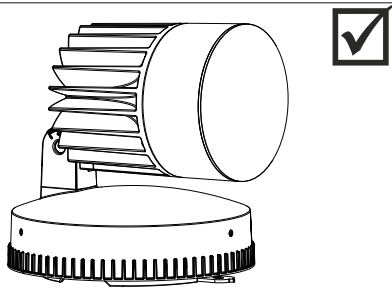

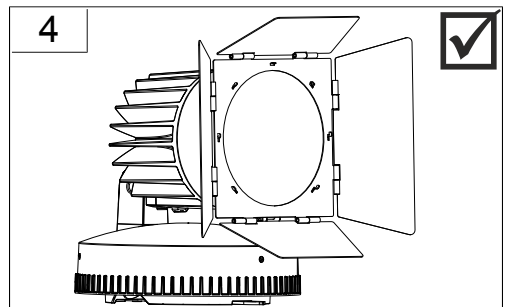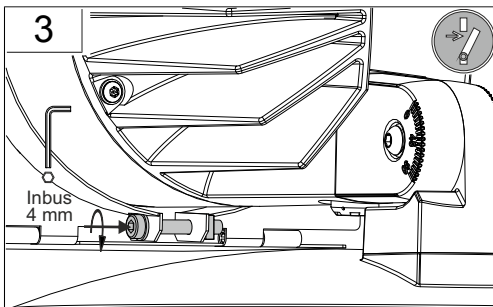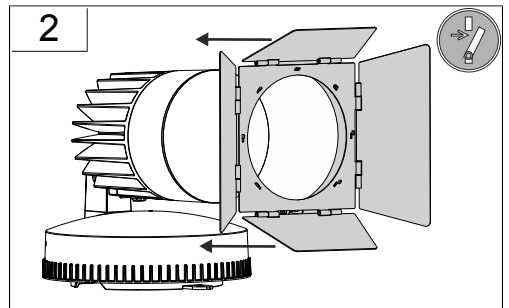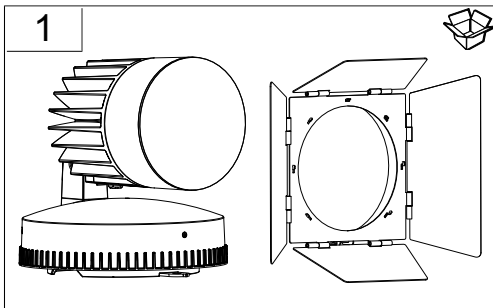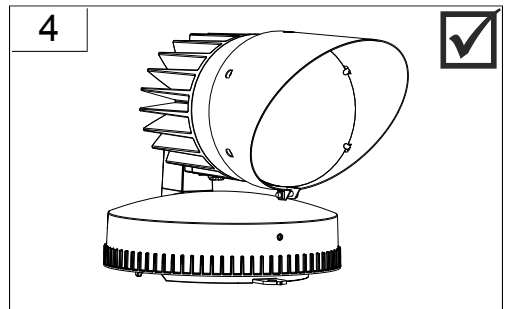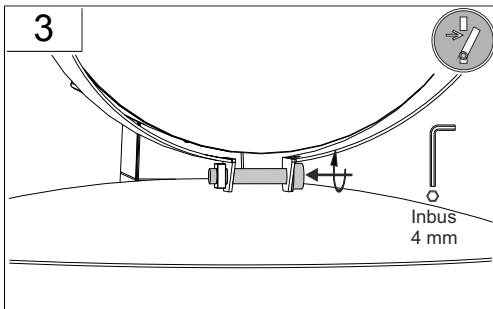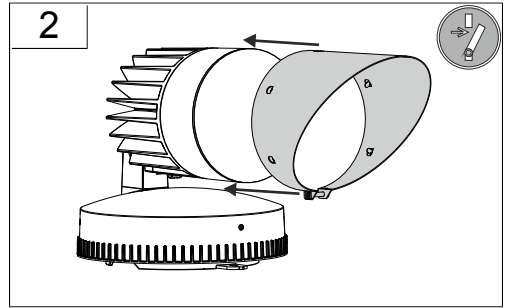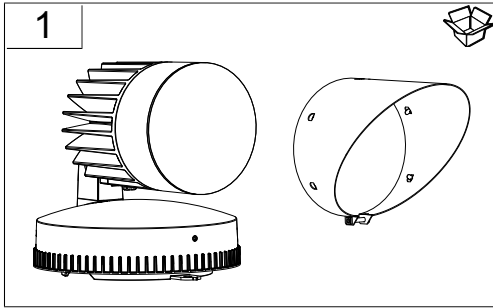





1

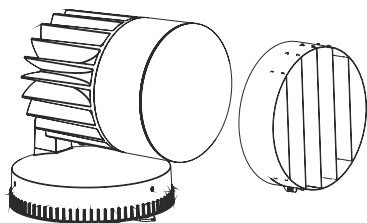


2



3

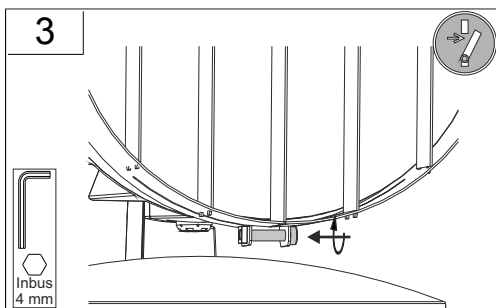

4





DIN 4844





Vor Wartung oder Reparatur freischalten/
power off before maintenance or repair



Temperatur / temperature
=> -20 °C - +35 °C

Indoor & Outdoor



! 0.5 m

Der Abstand zu beleuchteten Gegenständen
muss mindestens 0.5 m betragen!
The distance to the direct illuminated objects
must be at least 0.5 m!



	982163.003	L 169D 160, H 58	300 g
	982169.003	L 340, B 340, H 31	350 g
	982166.003	L 185, B 161D 160, H 170	150 g
	982160.006	D 161, H 58	380 g
	982160.007	D 161, H 58	380 g
	982160.0077	D 161, H 58	380 g
	982160.008	D 160, H 58	380 g
	982242.0031	D 240, H 40, HE 400	2,5 kg