

INSTRUCTION




TX-Move
742161.004.3.76



~ 220 - 240 V 50/60 Hz IP 20 IK04



Umgebungstemperatur /
temperature ambiante
=> 5 °C ... + 25 °C

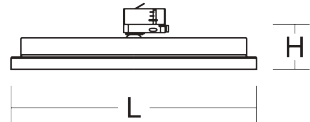

L 569, B 119, H 75

2,05 kg



Φ [lm]

P_{in} [W]

P_{out}

LED

10000

73

2 x 19,7 W

CCT [K]

CRI

RG


EEK

3500

80

RG 1

C



B₁₀
[St.]

B₁₆
[St.]

C₁₀
[St.]

C₁₆
[St.]

cos φ

53 A / 215 μ s

8

13

13

21

0,9

$f_{\text{min}} - f_{\text{max}}$
[MHz]

p_{EIRP} [mW]

13,553 – 13,567

0



Allgemeine Sicherheitshinweise

- Der elektrische Anschluss muss ordnungsgemäß nach geltenden Normen und den nationalen sowie internationalen Sicherheits- und Unfallverhütungsvorschriften erfolgen.
- Beschädigte Leuchten dürfen nicht betrieben werden.
- Keine Haftung für Schäden durch unsachgemäßen Einsatz.
- Bei Instandsetzung nur Originalteile verwenden.
- Tragfähigkeit der Decke und Befestigungselemente sicherstellen.

Betrieb der Leuchte

- Die unzulässigen Umgebungstemperaturen reduzieren die Lebensdauer der Leuchte, im Extremfall droht der Frühausfall.
- Zur Vermeidung von EMV-Problemen die Durchgangsverdrahtung nicht entlang der Leuchtenverdrahtung führen.
- Steuereingänge von dimmbaren Leuchten mit handelsüblichen für Netzspannung geeigneten Leitungen anschließen.

Manipulationen unserer Produkte sind unzulässig

Veränderung, Umarbeitung, Umkennzeichnung von Produkten sowie deren Verpackung sind unzulässig und verletzen u.a. unsere eingetragenen Warenzeichenrechte. Solche Modifikationen können technische Eigenschaften unserer Produkte negativ beeinflussen, diese zerstören und möglicherweise Folgeschäden an anderen Objekten verursachen. Für durch derartige Modifikationen verursachte Schäden kann der Hersteller in keinem Fall verantwortlich gemacht werden.



General Safety Information

- Electric connection must be appropriate according to all applicable standards and other national and international safety and accident prevention regulations.
- Damaged luminaires must not be operated.
- No liability is accepted for damages resulting from improper use.
- Use genuine parts only for repair.
- Ensure stability of the ceiling and fastening elements.

Operation of the luminaire

- Exceeding the permissible ambient temperature will reduce the luminaire's lifecycle, resulting in premature failure in extreme cases.
- Avoid ESD problems by not routing feed-through wiring directly along the wiring of the luminaire.
- Connect control inputs of dimmable luminaires with standard cables suitable for power supply voltage.

Manipulation of our products is not permitted

Modifications, reworking, re-labelling of products as well as their package is not permitted and infringes, amongst others, our registered trademark rights. Such modifications may affect technical properties of our products, damage them and possibly cause consequential damage to other objects. The manufacturer shall not be responsible under any circumstances for damage caused by such modifications.



 Bei Fragen zu unseren Symbolen, besuchen Sie folgende Webseite:
If you have any questions about our signs, visit the following website:



https://www.rzb.de/fileadmin/assets/downloads/PDF/RZB_Symbolklaerung.pdf

EEK 

Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse C entsprechend Verordnung (EU) 2019/2015

This product contains a light source of energy efficiency class C according to regulation (EU) No 2019/2015

 Jede zersprungene Schutzabdeckung ist zu ersetzen. DIN EN 60598

Replace any cracked protective shield. IEC DIN EN 60598


 Die Lichtquelle dieser Leuchte darf nur vom Hersteller oder einem von ihm beauftragten Servicetechniker oder einer vergleichbar qualifizierten Person ersetzt werden. DIN EN 60598-1 / IEC 60598-1

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person. DIN EN 60598-1 / IEC 60598-1



ON/OFF / DALI		CCT 3000 K				CCT 4000 K			
$\begin{matrix} 1 & 2 & 3 \\ \hline \text{I-E} \end{matrix}$	$P_{\text{g}} [\text{W}]$	$\Phi_{\text{g}}^{30^\circ} [\text{lm}]$	$\Phi_{\text{g}}^{90^\circ} [\text{lm}]$	$\Phi_{\text{g}}^{\text{AS}} [\text{lm}]$	$\Phi_{\text{g}}^{\text{OFF}} [\text{lm}]$	$\Phi_{\text{g}}^{30^\circ} [\text{lm}]$	$\Phi_{\text{g}}^{90^\circ} [\text{lm}]$	$\Phi_{\text{g}}^{\text{AS}} [\text{lm}]$	$\Phi_{\text{g}}^{\text{OFF}} [\text{lm}]$
1	19	2700	2750	2600	2350	2850	2900	2750	2450
2	27	3750	3800	3600	3200	3900	4000	3750	3350
3	40	5250	5300	5000	4500	5450	5550	5250	4700


ON/OFF / DALI		CCT 3500 K			
$\begin{matrix} 1 & 2 & 3 \\ \hline \text{I-E} \end{matrix}$	$P_{\text{g}} [\text{W}]$	$\Phi_{\text{g}}^{30^\circ} [\text{lm}]$	$\Phi_{\text{g}}^{90^\circ} [\text{lm}]$	$\Phi_{\text{g}}^{\text{AS}} [\text{lm}]$	$\Phi_{\text{g}}^{\text{OFF}} [\text{lm}]$
1	19	2800	2850	2700	2400
2	27	3850	3900	3700	3300
3	40	5350	5450	5150	4600



ON/OFF / DALI		CCT 2700 K			
$\begin{matrix} 1 & 2 & 3 \\ \hline \text{I-E} \end{matrix}$	$P_{\text{g}} [\text{W}]$	$\Phi_{\text{g}}^{30^\circ} [\text{lm}]$	$\Phi_{\text{g}}^{90^\circ} [\text{lm}]$	$\Phi_{\text{g}}^{\text{AS}} [\text{lm}]$	$\Phi_{\text{g}}^{\text{OFF}} [\text{lm}]$
1	18	1950	2000	1900	1700
2	24	2550	2600	2500	2200
3	33	3350	3450	3300	2950

ON/OFF / DALI		CCT 3000 K				CCT 4000 K			
$\begin{matrix} 1 & 2 & 3 \\ \hline \text{I-E} \end{matrix}$	$P_{\text{g}} [\text{W}]$	$\Phi_{\text{g}}^{30^\circ} [\text{lm}]$	$\Phi_{\text{g}}^{90^\circ} [\text{lm}]$	$\Phi_{\text{g}}^{\text{AS}} [\text{lm}]$	$\Phi_{\text{g}}^{\text{OFF}} [\text{lm}]$	$\Phi_{\text{g}}^{30^\circ} [\text{lm}]$	$\Phi_{\text{g}}^{90^\circ} [\text{lm}]$	$\Phi_{\text{g}}^{\text{AS}} [\text{lm}]$	$\Phi_{\text{g}}^{\text{OFF}} [\text{lm}]$
1	41	5800	5850	5500	4900	6250	6300	5900	5250
2	57	7850	7950	7400	6650	8450	8550	8000	7150
3	73	9600	9700	9050	8150	10350	10450	9750	8750

ON/OFF / DALI		CCT 3500 K			
$\begin{matrix} 1 & 2 & 3 \\ \hline \text{I-E} \end{matrix}$	$P_{\text{g}} [\text{W}]$	$\Phi_{\text{g}}^{30^\circ} [\text{lm}]$	$\Phi_{\text{g}}^{90^\circ} [\text{lm}]$	$\Phi_{\text{g}}^{\text{AS}} [\text{lm}]$	$\Phi_{\text{g}}^{\text{OFF}} [\text{lm}]$
1	41	6050	6100	5750	5100
2	57	8200	8300	7750	6950
3	73	10050	10150	9450	8500

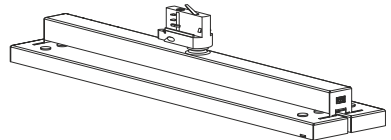

ON/OFF / DALI		CCT 2700 K			
$\begin{matrix} 1 & 2 & 3 \\ \hline \text{I-E} \end{matrix}$	$P_{\text{g}} [\text{W}]$	$\Phi_{\text{g}}^{30^\circ} [\text{lm}]$	$\Phi_{\text{g}}^{90^\circ} [\text{lm}]$	$\Phi_{\text{g}}^{\text{AS}} [\text{lm}]$	$\Phi_{\text{g}}^{\text{OFF}} [\text{lm}]$
1	38	4250	4300	4000	3600
2	51	5550	5600	5250	4700
3	62	6600	6650	6200	5550



EG-Konformitätserklärung
EC-Declaration of Conformity
Déclaration UE de conformité
Declaración de conformidad CE
Deklaracja zgodności UE



Hersteller, Anschrift:
Manufacturer, address:
Fabricant, adresse:
Fabricante, dirección:
Producent, adres:

RZB Rudolf Zimmermann, Bamberg GmbH
Rheinstrasse 16
96052 Bamberg
Deutschland / Germany / Allemagne / Alemania / Niemcy

Wir erklären in alleiniger Verantwortung, dass das Produkt
 We declare under sole responsibility that the product
 Nous déclarons, sous notre propre responsabilité, que le produit
 Declaramos bajo nuestra sola responsabilidad que el producto
 Deklarujemy z pełną odpowiedzialnością, że produkt

Produktbezeichnung:**Product designation:****TX-Move****Description des produits:****742161.004.3.76****Designación de producto:****Oznaczenie produktu:**

mit den folgenden EG-Richtlinien und Normen übereinstimmt:

complies with the following EC Directives and standards:

est conforme aux normes et directives de l'UE suivantes:

cumple con las siguientes directivas y normas CE:

jest zgodny z następującymi dyrektywami UE i normami:

<p>RED Directive 2014/53/EU</p>	<p>(3.1a) EN 60598-1:2021/A11:2022 EN 60598-2-1:1989 EN 62471:2008 EN 62493:2010 (3.1b) EN 55015:2019/A11:2020 EN 61000-3-2:2019/A1:2021 EN 61000-3-3:2013+A1:2019+A2:2021+A2:2021/AC:2022 EN 61547:2023 (3.2) EN 300 330:V2.1.1</p>
<p>RoHS Directive 2011/65/EU</p>	<p>EN 63000:2018</p>
<p>ErP Directive 2009/125/EC</p>	<p>(EU) 2019/2020</p>

Dokument-Nr. / Document No. / Document No.
 Document No. / Nr dokumentu

24004205

Aussteller / Issuer / Délivré par:
 Otorgante / Wystawca:

RZB Rudolf Zimmermann, Bamberg GmbH

Ort, Datum / Place, Date / Lieu, date:

Bamberg, 02.02.2024

Lugar, Fecha / Miejsce, data:


Rechtsverbindliche Unterschrift:

Legally binding signature:






Signature juridiquement obligatoire:





Firma legalmente vinculante:

Prawnie wiązacy podpis:


 Reiner Jürgens
 CEO/Direktor Zarządzający/Geschäftsführer

1/1

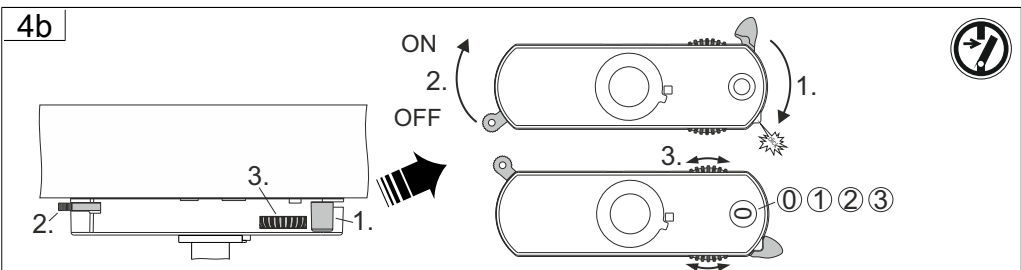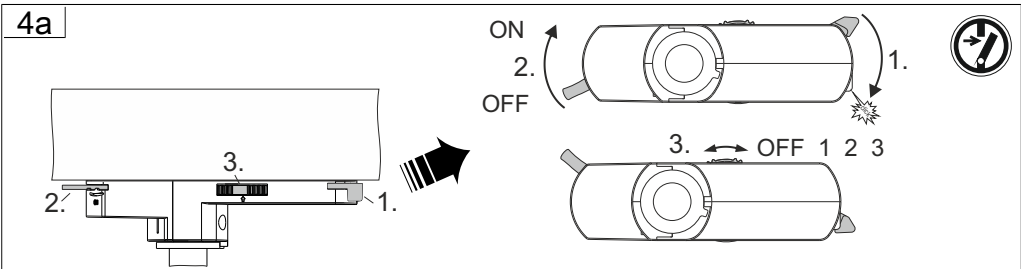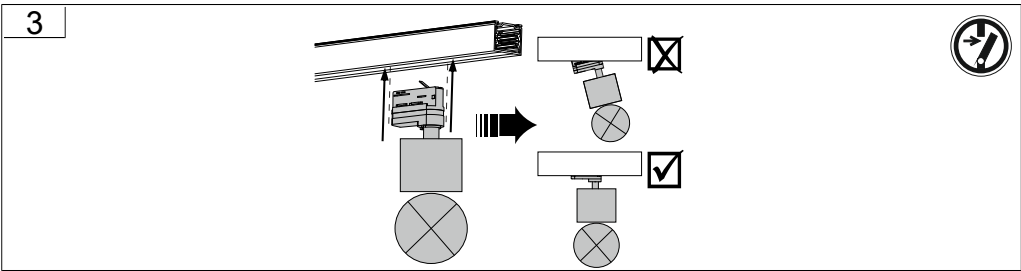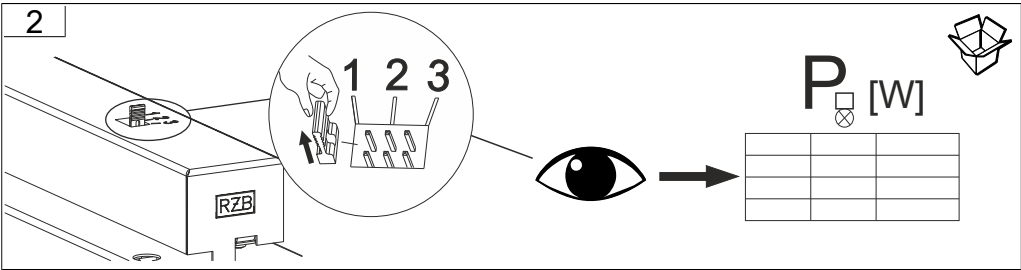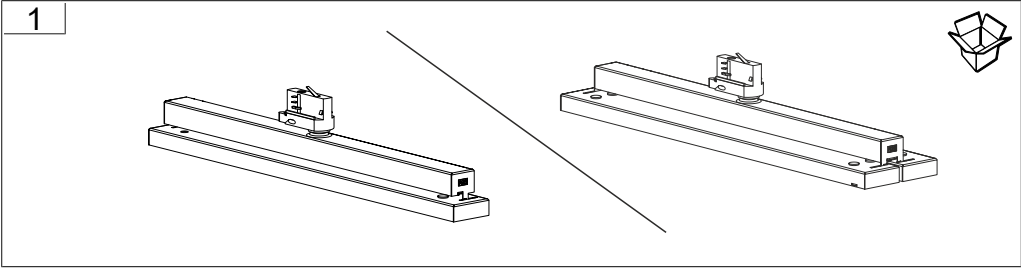

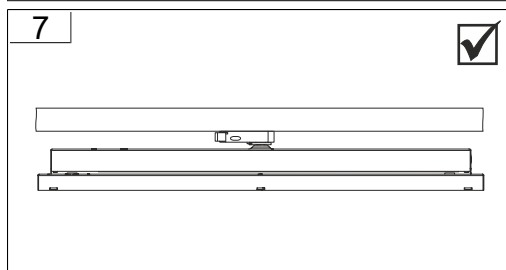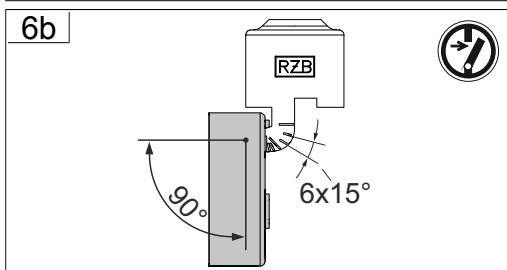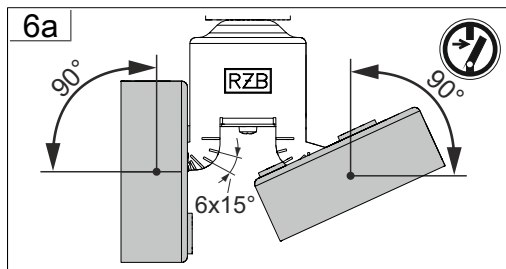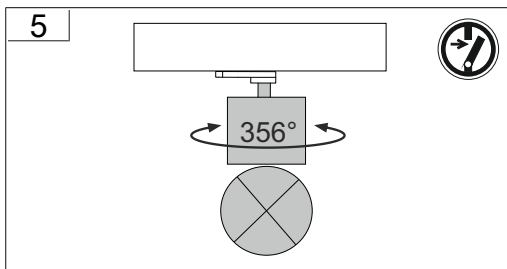





RZB - Rudolf Zimmermann, Bamberg GmbH

 Rheinstraße 16, 96052 Bamberg

 0951/7909-0

 0951/7909-198

 info@rzb-leuchten.de