

INSTRUCTION

05-2017

RZB
LIGHTING

Alu-Star

721802.0031



IP 65 IK07





220 - 240 V / 50 - 60 Hz



3 x 2,5 mm²



2,50 mm²

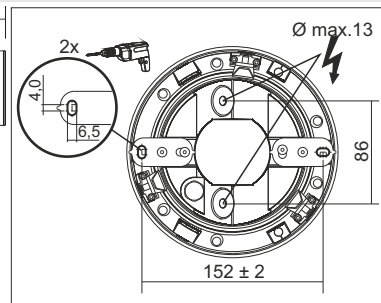

721802.0031

L 200, B 180, H 210

LED

42 W

2,5 kg



EEK_{LED}

EEK

CRI

CCT


3850 lm

A+

A+

80

3000K




31

50

52

85

5 A



Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

EN 12464



EN 12464




EN 12464
Wartungsplan/
Maintenance
schedule




RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de




1




2




3




4



5

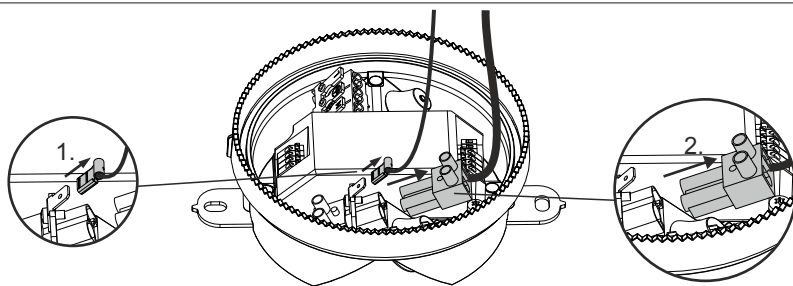


6

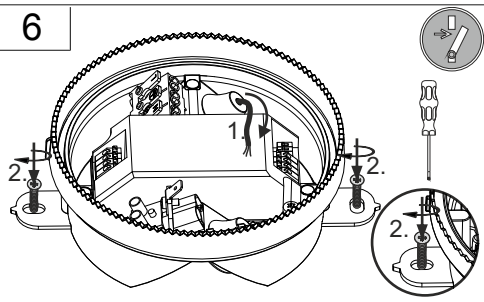





7

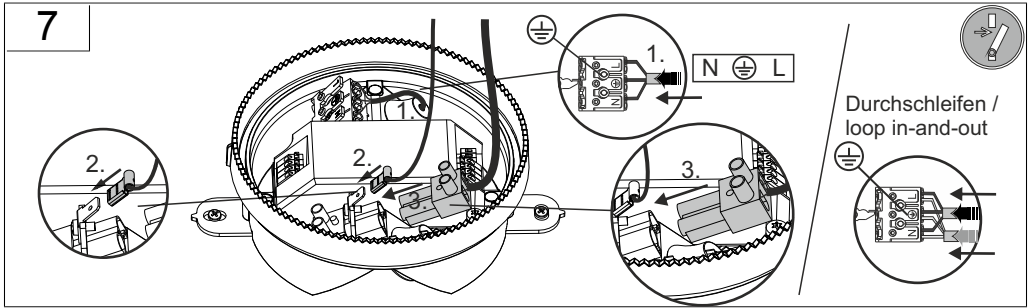


8

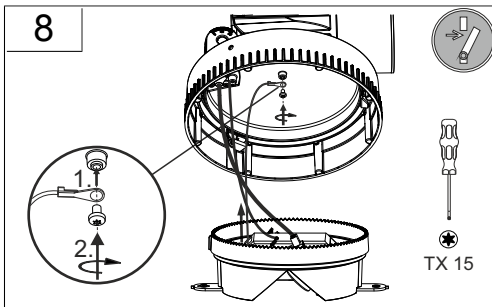


9

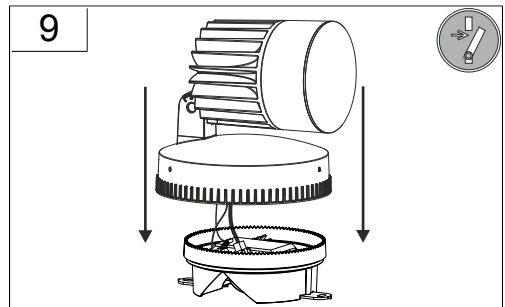

10

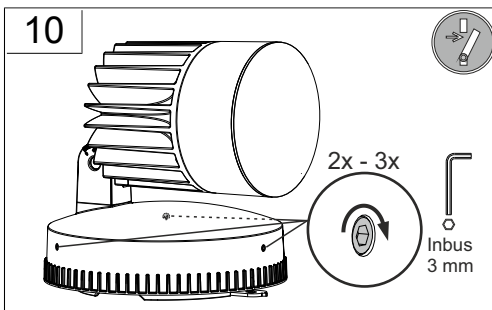


11

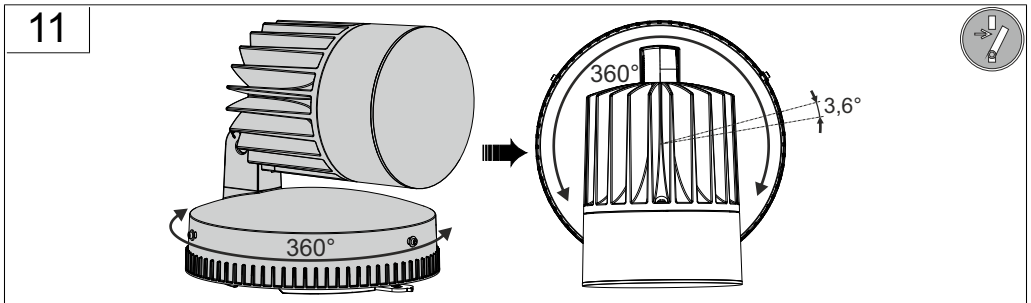





12

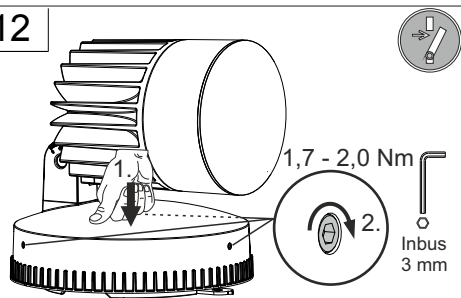


13








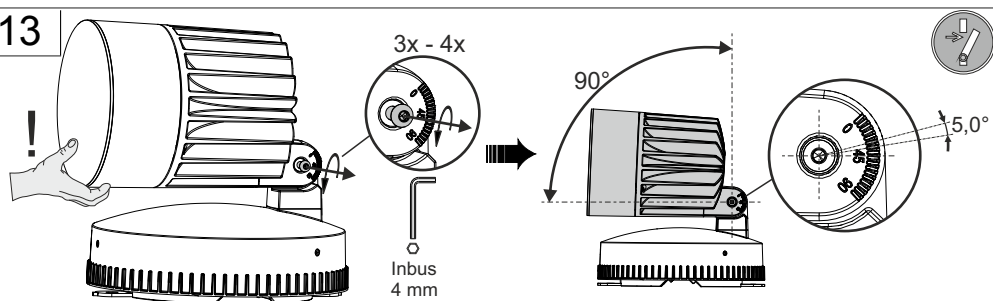


14

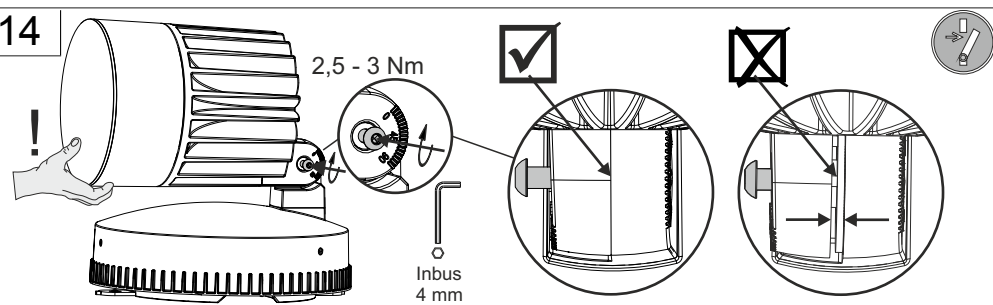


15

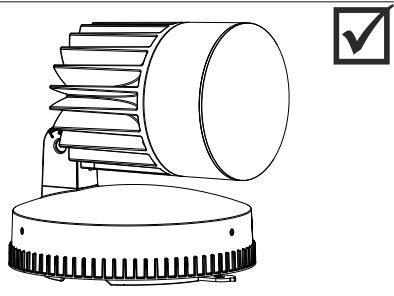

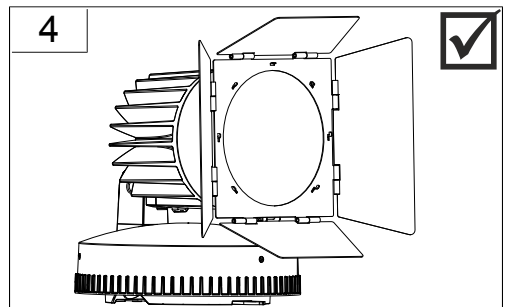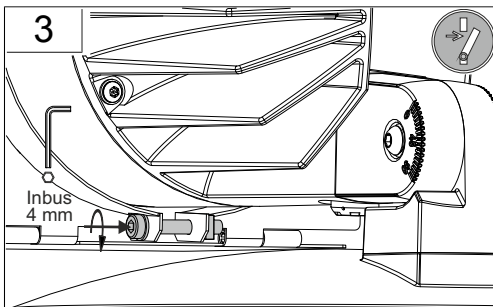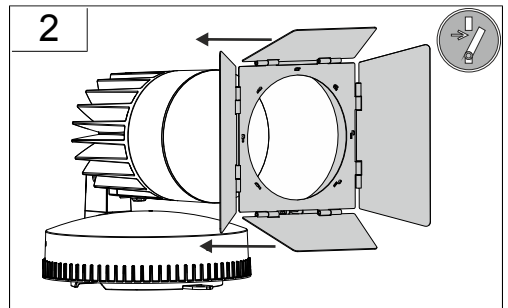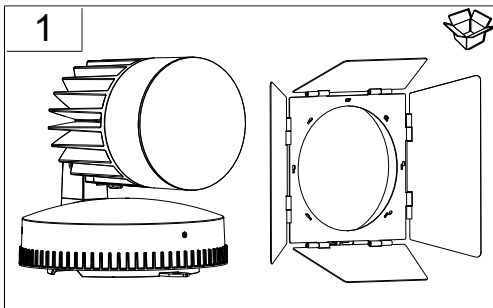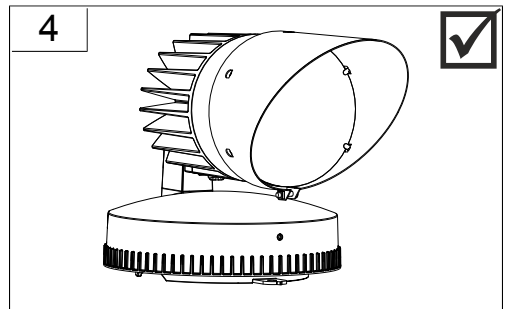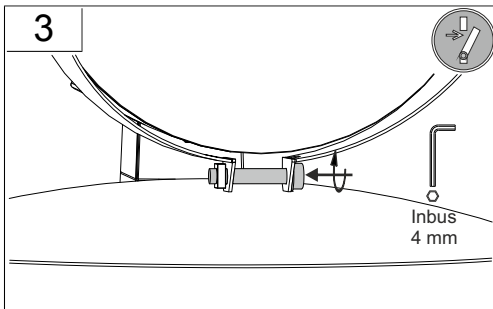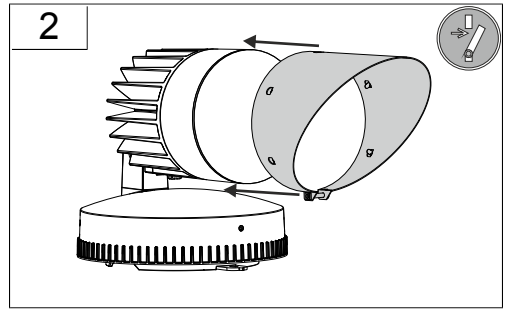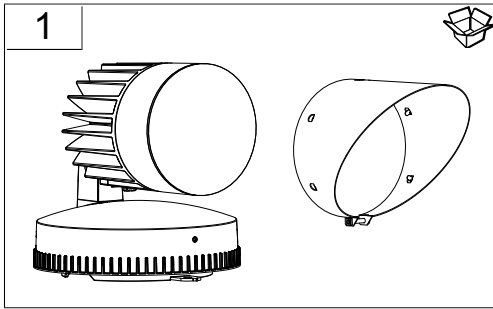





1

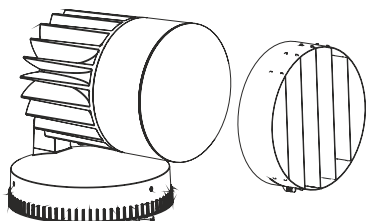


2



3

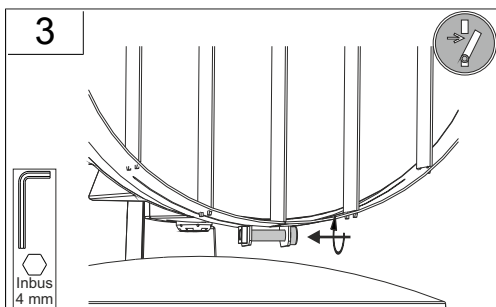

4





DIN 4844





Vor Wartung oder Reparatur freischalten/
power off before maintenance or repair



Temperatur / temperature
=> -25 °C - +45 °C

Indoor & Outdoor



! 0.5 m

Der Abstand zu beleuchteten Gegenständen
muss mindestens 0.5 m betragen!
The distance to the direct illuminated objects
must be at least 0.5 m!



	982162.003	L 129D 121, H 51	220 g
	982165.003	L 140, B 121, H 130	90 g
	982168.003	L 266, B 266, H 31	250 g
	982159.006	D 121, H 58	250 g
	982159.007	D 121, H 58	250 g
	982159.0077	D 121, H 58	250 g
	982159.008	D 121, H 58	250 g
	982241.0031	D 180, H 40, HE 400	1,9 kg