




DIN 4844



Vor Wartung oder Reparatur freischalten/
power off before maintenance or repair

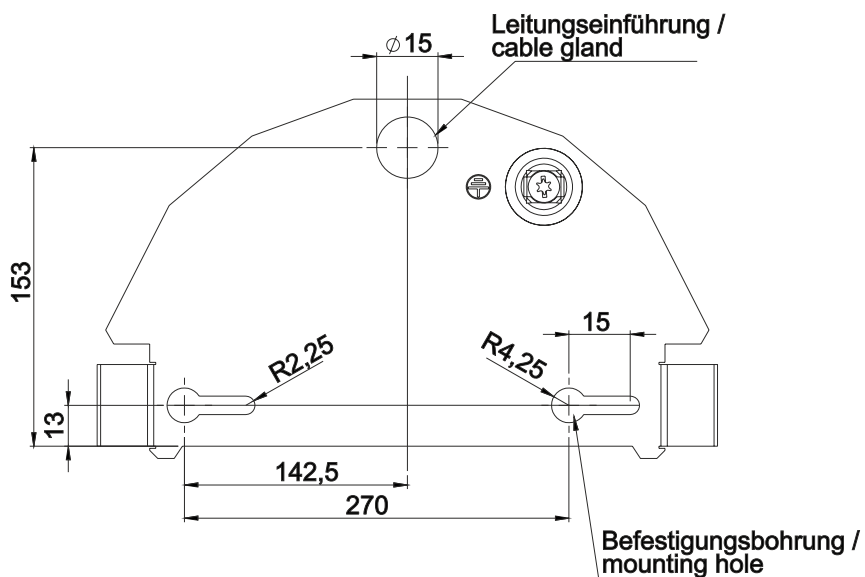

INSTRUCTION

 10-2017
09-3202.022

Home 502



IP 20 IK06






220 - 240 V / 50 Hz



3 x 1,5 mm²




4,00 mm²

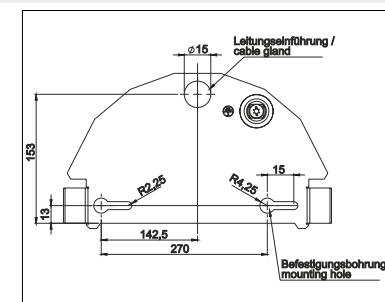

P



221179.002	D 400, H 52	LED	30 W	1,71 kg
221179.002.1	D 400, H 52	LED	30 W	1,71 kg
Φ	EEK _{LED}	EEK	CRI	CCT
2400 lm	A	A	80	3000K
2500 lm	A	A	80	4000K
B10	B16	C10	C16	I max / I T50
5	9	9	15	36,4 A
5	9	9	15	36,4 A



Die Leuchte darf nur mit ihren vollständigen
Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete
protective covers only.

EN 12464



EN 12464



RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de

