


Hinweis: siehe technische Daten vom Artikel! /
notice: see technical data sheets of product!


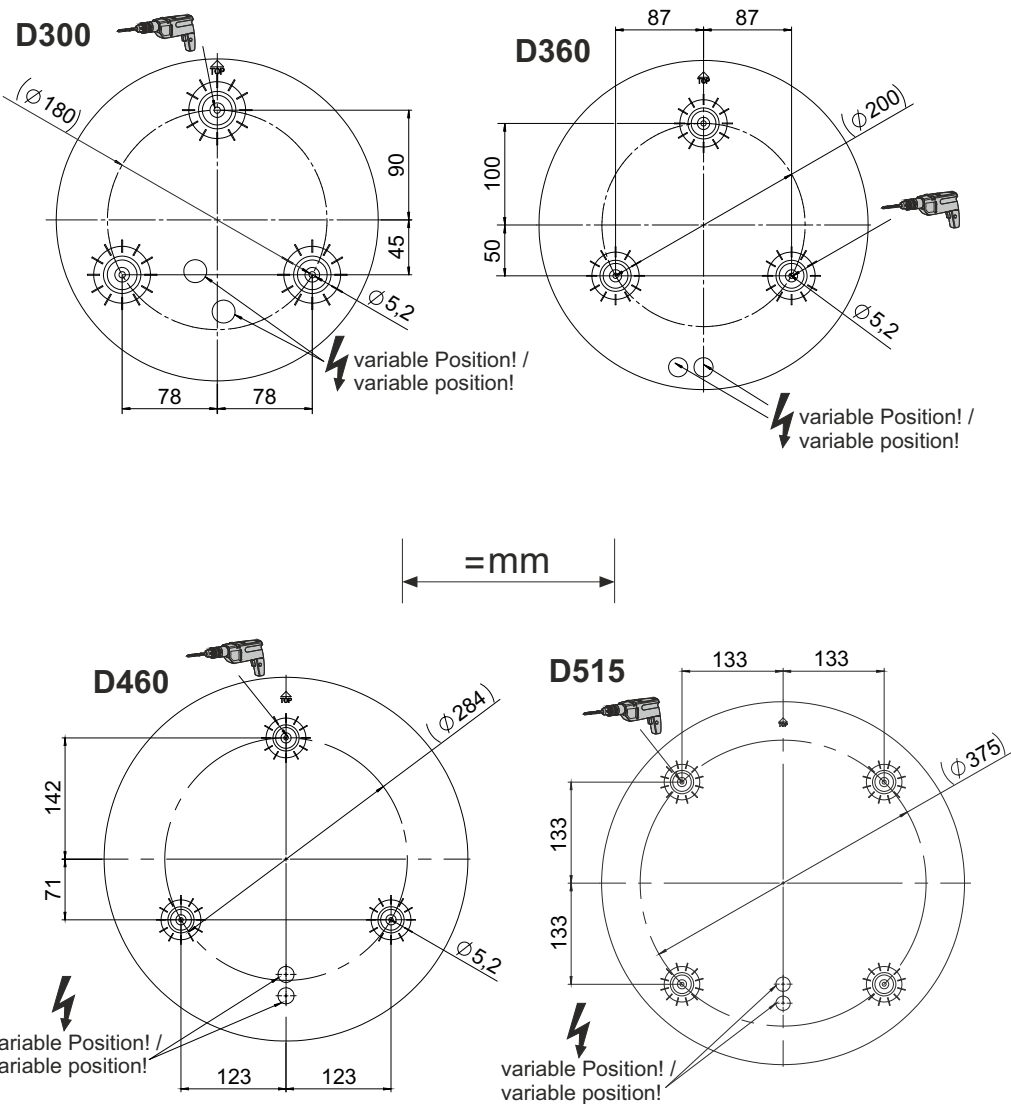


INSTRUCTION

09-3037.052
15-2018

Flat Polymero Kreis LED Wand-/Deckenanbau

IP 40 220-240 V / 50-60 Hz 3 x 0,75 mm² 4 x 0,75 mm² (*.19) 5 x 0,75 mm² (*.76) 0,75 mm² - 1,5 mm²



XXXXXX.XXX.19

 PMMA
IK03


DIM P




311619.002.7	D 300, H 80	4xLED, 830	-	10 W	0,86 Kg
311619.002.7.76	D 300, H 80	4xLED, 830	DALI	10 W	0,91 Kg
311619.002.5	D 300, H 80	4xLED, 840	-	10 W	0,86 Kg
311619.002.5.76	D 300, H 80	4xLED, 840	DALI	10 W	0,91 Kg
311620.002.7	D 300, H 80	6xLED, 830	-	14 W	0,91 Kg
311620.002.7.76	D 300, H 80	6xLED, 830	DALI	14 W	0,96 Kg
311620.002.5	D 300, H 80	6xLED, 840	-	14 W	0,91 Kg
311620.002.5.76	D 300, H 80	6xLED, 840	DALI	14 W	0,96 Kg
311949.002.1	D 300, H 80	1xLED, 830	-	13,5 W	1,05 Kg
311949.002.3	D 300, H 80	1xLED, 840	-	13,5 W	1,05 Kg
311610.002.7	D 360, H 87	6xLED, 830	-	14 W	1,34 Kg
311610.002.7.76	D 360, H 87	6xLED, 830	DALI	14 W	1,43 Kg
311610.002.5	D 360, H 87	6xLED, 840	-	14 W	1,34 Kg
311610.002.5.76	D 360, H 87	6xLED, 840	DALI	14 W	1,43 Kg
311611.002.7	D 460, H 93	8xLED, 830	-	19 W	2,03 Kg
311611.002.7.76	D 460, H 93	8xLED, 830	DALI	19 W	2,03 Kg
311611.002.7.19	D 460, H 93	8xLED, 830	-	19 W	1,94 Kg
311611.002.5	D 460, H 93	8xLED, 840	-	19 W	2,03 Kg
311611.002.5.76	D 460, H 93	8xLED, 840	DALI	19 W	2,03 Kg
311611.002.5AV	D 460, H 93	8xLED, 840	-	19 W	2,03 Kg
311611.002.5.19	D 460, H 93	8xLED, 840	-	19 W	1,94 Kg
311612.002.7	D 515, H 98	8xLED, 830	-	19 W	2,70 Kg
311612.002.7.76	D 515, H 98	8xLED, 830	DALI	19 W	2,69 Kg
311612.002.7.19	D 515, H 98	8xLED, 830	-	19 W	2,72 Kg
311612.002.5	D 515, H 98	8xLED, 840	-	19 W	2,70 Kg
311612.002.5.76	D 515, H 98	8xLED, 840	DALI	19 W	2,69 Kg
311612.002.5.19	D 515, H 98	8xLED, 840	-	19 W	2,72 Kg
311613.002.7	D 515, H 98	10xLED, 830	-	24 W	2,71 Kg
311613.002.7.76	D 515, H 98	10xLED, 830	DALI	24 W	2,87 Kg
311613.002.5	D 515, H 98	10xLED, 840	-	24 W	2,71 Kg
311613.002.5.76	D 515, H 98	10xLED, 840	DALI	24 W	2,87 Kg



Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.


EN 12464



EN 12464



RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de



PC IK10 DIM P



311619.002.8	D 300, H 80	4xLED, 830	-	10 W	0,86 Kg
311619.002.8.76	D 300, H 80	4xLED, 830	DALI	10 W	0,91 Kg
311619.002.6	D 300, H 80	4xLED, 840	-	10 W	0,86 Kg
311619.002.6.76	D 300, H 80	4xLED, 840	DALI	10 W	0,91 Kg
311620.002.8	D 300, H 80	6xLED, 830	-	14 W	0,91 Kg
311620.002.8.76	D 300, H 80	6xLED, 830	DALI	14 W	0,96 Kg
311620.002.6	D 300, H 80	6xLED, 840	-	14 W	0,91 Kg
311620.002.6.76	D 300, H 80	6xLED, 840	DALI	14 W	0,96 Kg
311949.002.2	D 300, H 80	1xLED, 830	-	13,5 W	1,05 Kg
311949.002.4	D 300, H 80	1xLED, 840	-	13,5 W	1,05 Kg
311610.002.8	D 360, H 87	6xLED, 830	-	14 W	1,34 Kg
311610.002.8.76	D 360, H 87	6xLED, 830	DALI	14 W	1,43 Kg
311610.002.6	D 360, H 87	6xLED, 840	-	14 W	1,34 Kg
311610.002.6.76	D 360, H 87	6xLED, 840	DALI	14 W	1,35 Kg
311611.002.8	D 460, H 93	8xLED, 830	-	19 W	2,03 Kg
311611.002.8.76	D 460, H 93	8xLED, 830	DALI	19 W	2,03 Kg
311611.002.8.19	D 460, H 93	8xLED, 830	-	19 W	1,94 Kg
311611.002.6	D 460, H 93	8xLED, 840	-	19 W	2,03 Kg
311611.002.6.76	D 460, H 93	8xLED, 840	DALI	19 W	2,03 Kg
311611.002.6.19	D 460, H 93	8xLED, 840	-	19 W	1,94 Kg
311612.002.8	D 515, H 98	8xLED, 830	-	19 W	2,70 Kg
311612.002.8.76	D 515, H 98	8xLED, 830	DALI	19 W	2,69 Kg
311612.002.8.19	D 515, H 98	8xLED, 830	-	19 W	2,72 Kg
311612.002.6	D 515, H 98	8xLED, 840	-	19 W	2,70 Kg
311612.002.6.76	D 515, H 98	8xLED, 840	DALI	19 W	2,69 Kg
311612.002.6.19	D 515, H 98	8xLED, 840	-	19 W	2,72 Kg
311613.002.8	D 515, H 98	10xLED, 830	-	24 W	2,71 Kg
311613.002.8.76	D 515, H 98	10xLED, 830	DALI	24 W	2,87 Kg
311613.002.6	D 515, H 98	10xLED, 840	-	24 W	2,71 Kg
311613.002.6.76	D 515, H 98	10xLED, 840	DALI	24 W	2,87 Kg



	08-311616.002	D 300, H 75	200 g
	08-311595.002	D 360, H 81	300 g
	08-311600.002	D 460, H 87	500 g
	08-311604.002	D 515, H 93	680 g
	08-311616.012	D 300, H 75	200 g
	08-311595.012	D 360, H 81	300 g
	08-311600.012	D 460, H 87	500 g
	08-311604.012	D 515, H 92	680 g

Instruction: +

09-3037.052
15-2018

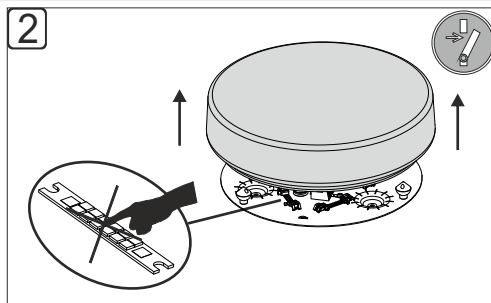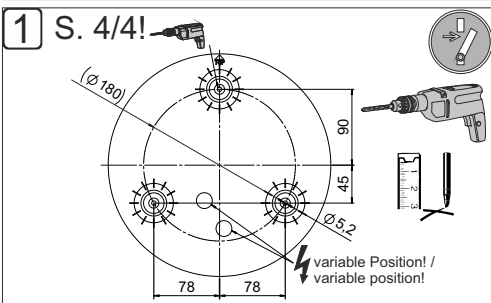

Instruction: +

09-3037.052
15-2018

